

FRONT LIGHTS



AURA 30

40 m
30 Lux
BATTERY-POWERED



- Effectiveness: 30 lux (15 lux in Eco mode)
- Beam range: 40 m
- Run time: 5 h in Standard mode; 15 h in Eco mode
- Splash resistant in accordance with IPX4
- Two-stage battery indicator

AURA 30 | Item no. 15950

AURA 30 / CURVE Set | Item no. 15970

AURA 35 USB

45 m
35 Lux
IMPROVED SIDE VISIBILITY




- Effectiveness: 35 lux (15 lux in Eco mode)
- Beam range: 45 m
- Run time: 5 h in Standard mode; 12 h in Eco mode
- Switch on protection (double click for ON)
- Splash resistant in accordance with IPX4
- Two-stage battery/charge indicator

AURA 35 USB | Item no. 17350

AURA 35 USB / NUGGET II Set | Item no. 17360

AURA 45 USB

55 m
45 Lux
BRIGHTNESS SENSOR

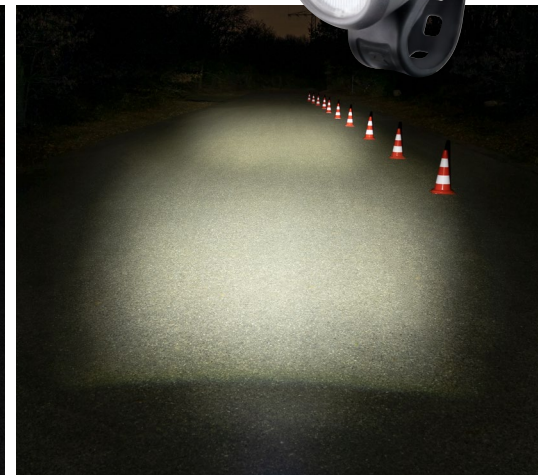

- Effectiveness: 45 lux (15 lux in Eco-Modus)
- Beam range: 55 m
- Run time: 6.5 h in Standard mode; 21 h in Eco mode
- With brightness sensor, which automatically adjusts the light intensity to the ambient light
- Splash resistant in accordance with IPX4
- Two-stage battery/charge indicator

AURA 45 USB | Item no. 17450

AURA 45 USB / NUGGET II Set | Item no. 17460

AURA 60 USB

70 m
60 Lux
LIGHT GUIDE



- Effectiveness: 60 lux (30 lux in Mid mode; 18 lux in Eco mode)
- Beam range: 70 m
- Run time: 4 h in Standard mode; 7 h in Mid mode; 10 h in Eco mode
- Light Guide for excellent side visibility

AURA 60 USB | Item no. 17700

AURA 60 USB / NUGGET II Set | Item no. 17750

AURA 60 USB / SIGMA® INFINITY Set | Item no. 17760

AURA 80 USB

90 m
80 Lux
BATTERY AND MODE INDICATOR



- Effectiveness: 80 lux (60 lux in Mid mode; 40 lux in Low mode; 20 lux in Eco mode)
- Beam range: 90 m
- Run time: 4 h in Standard mode; 5 h in Mid mode; 6.5 h in Low mode; 15 h in Eco mode
- Light Guide for excellent side visibility


AURA 80 USB | Item no. 17800

AURA 80 USB / NUGGET II Set | Item no. 17850

AURA 80 USB / BLAZE Set | Item no. 17860

AURA 100 / BLAZE LINK

110 m
100 Lux
WIRELESS CONNECTED LIGHTS

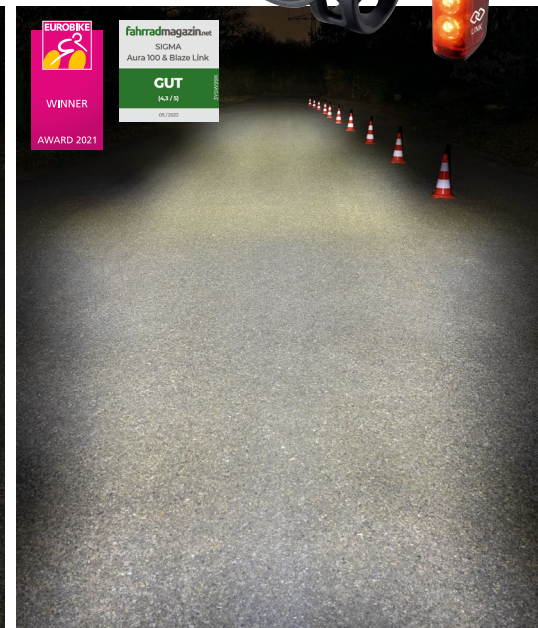

- Effectiveness: 100 lux (75 lux in Mid mode, 50 lux in Low mode and 25 lux in Eco mode)
- Beam range: 110 m
- Run time: 3 h in Standard mode; 4 h in Mid mode; 6 h in Low mode, 12 h in Eco mode
- Light Guide for excellent side visibility

- BLAZE LINK: see features of the BLAZE

AURA 100 / BLAZE LINK SET | Item no. 17950

POWER LIGHTS



BUSTER 150

74 m*
150 Lumens
FIVE DIFFERENT LIGHT MODES



- Maximum light output: 150 lumens
- Beam range: 74 m*
- Run time: 3 h in High mode, 7.5 h in Mid mode, 14.5 h in Low mode, 5 h in Night flashing mode, 25 h in Day flashing mode
- Splash resistant in accordance with IPX4
- Five pre-set mode profiles

BUSTER 150 | Item no. 19150
BUSTER 150 / NUGGET II FLASH Set | Item no. 19170

BUSTER 400

120 m*
400 Lumens
PRECISE LED INDICATORS



- Maximum light output: 400 lumens
- Beam range: 120 m*
- Run time: 2 h in High mode, 4 h in Mid mode, 9 h in Low mode, 5 h in Night flashing mode, 25 h in Day flashing mode
- Splash resistant in accordance with IPX4
- Five pre-set mode profiles

BUSTER 400 | Item no. 19600
BUSTER 400 / BUSTER RL 80 Set | Item no. 19630
BUSTER 400 / BLAZE FLASH Set | Item no. 19620

BUSTER 800/HL

170 m*
800 Lumens
FIVE PRE-SET MODE PROFILES



- Maximum light output: 800 lumens
- Beam range: 170 m*
- Run time: 2 h in High mode, 3 h in Mid mode, 9 h in Low mode, 5 h in Night flashing mode, 30 h in Day flashing mode
- Splash resistant in accordance with IPX4
- Six-stage battery indicator and five-stage charge indicator

BUSTER 800 | Item no. 19800
BUSTER 800 HL | Item no. 19810
BUSTER 800 / BUSTER RL 80 Set | Item no. 19830
BUSTER 800 / BUSTER RL 150 Set | Item no. 19820

BUSTER 1100/HL

165 m*
1100 Lumens
INNOVATIVE DOUBLE LENS



- Maximum light output: 1100 lumens
- Beam range: 165 m*
- Run time: 2 h in High mode, 2.5 h in Mid mode, 5 h in Low mode, 16 h in Eco mode, 5 h in Night flashing mode, 50 h in Day flashing mode
- Splash resistant in accordance with IPX4
- Six-stage battery indicator and five-stage charge indicator

BUSTER 1100 | Item no. 19850
BUSTER 1100 HL | Item no. 19860
BUSTER 1100 / BUSTER RL 150 Set | Item no. 19870

BUSTER 2000

200 m
2000 Lumens
THREE CREE LEDs



- Maximum light output: 2000 lumens
- Beam range: 200 m
- Run time: 2.5 h in High-power mode, 5 h in Power mode, 10 h in Standard mode, 20 h in Eco mode, 9 h in Flashing mode, 11 h in Pulsing mode, 10 h in SOS-flashing mode
- Splash resistant in accordance with IP44

BUSTER 2000 | Item no. 17000



BRAKE LIGHT
FUNCTION



BUSTER RL 80

80 Lumens
MODE MEMORY FUNCTION

BUSTER RL 80 | Item no. 15500

BUSTER RL 150

150 Lumens
FLASH LIGHT

BUSTER RL 150 | Item no. 15600



BRAKE LIGHT
FUNCTION

BLAZE/FLASH

AUTO SENSOR LIGHT

BLAZE | Item no. 15100
BLAZE FLASH | Item no. 15110



SIGMA® INFINITY

INEXHAUSTIBLE POWER

SIGMA® INFINITY | Item no. 15200